AIR COOLED DIESEL ENGINE

NK1100FE
NK1105FE





Application:

AGRICULTURE MACHINERY · GENERATOR · FIRE FIGHTING · WATER PUMP


Certification:

CE · EURO STAGE 5


MODEL		NK1100FE	NK1105FE
ENGINE TYPE		single cylinder, vertical, 4 stroke direct injection	single cylinder, vertical, 4 stroke direct injection
BORE * STROKE	mm	100*85	105*85
DISPLACEMENT	cc	668	735
ROTATION SPEED	rpm	3000	3000
MAX. OUTPUT POWER	HP	15	17
FUEL TANK CAPACITY	Lt	6.5	6.5
OIL CAPACITY	ml	2100	2100
FUEL CONSUMPTION	gr/Kw*h	<286	<276
STARTING SYSTEM		Electric	Electric
COMPRESSION RATIO		19 :1	19 :1
PACKAGE DIMENSIONS	mm	525 x 490 x 595	530 x 520 x 670
WEIGHT NET / GROSS	Kg	60/62	62/65
LOADING 20GP/40GP/40HQ	pcs	192 / 384 / 384	96 / 192 / 204
MOQ	pcs	10	10

PERFORMANCE CURVES

NK1100FE

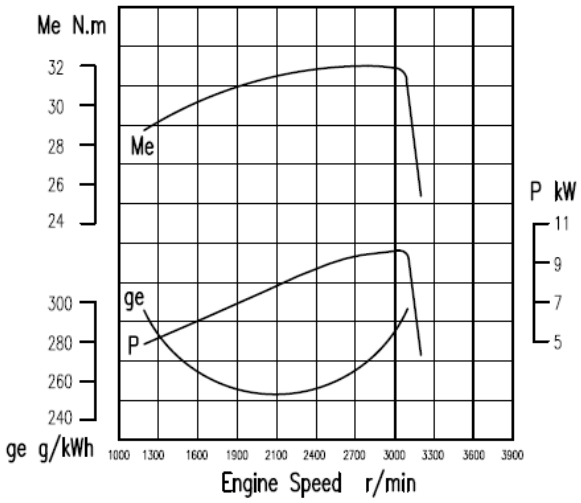



NK1105FE

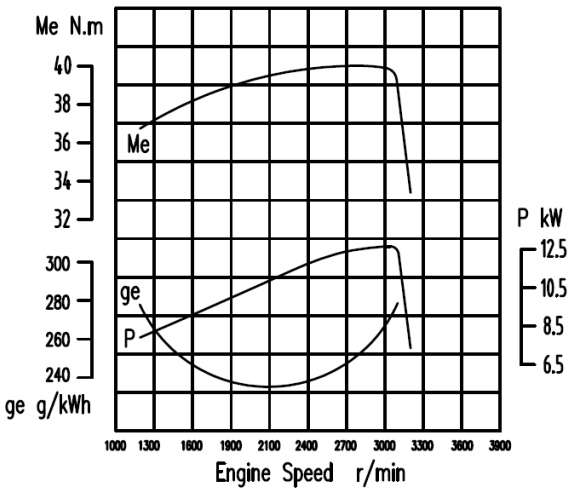


ENGINES DIMENSIONS


NK1100FE

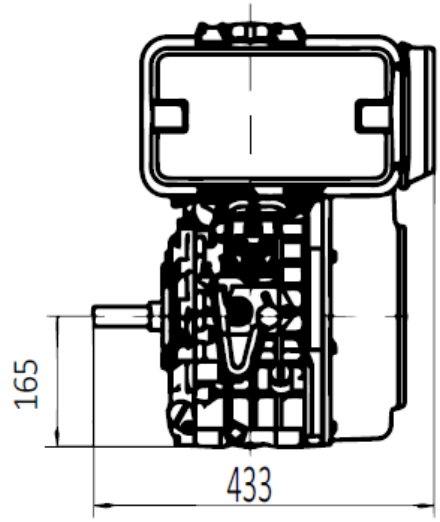

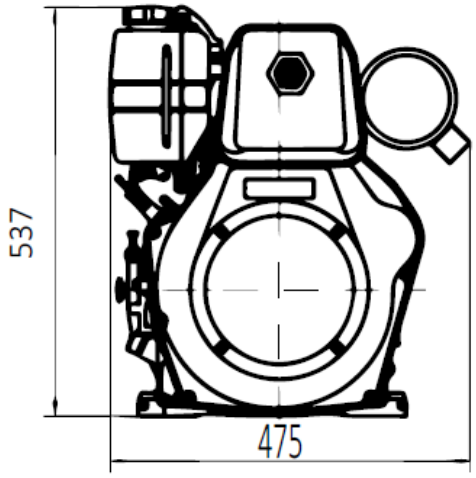


NK1105FE

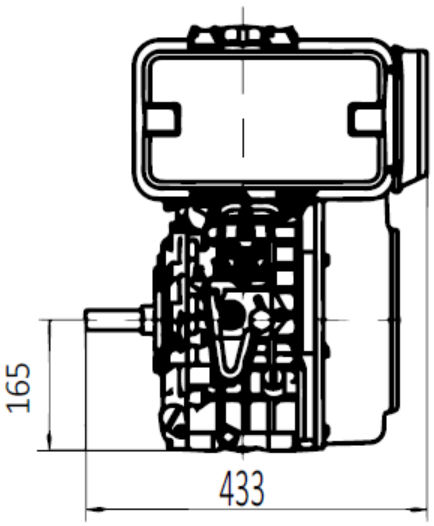

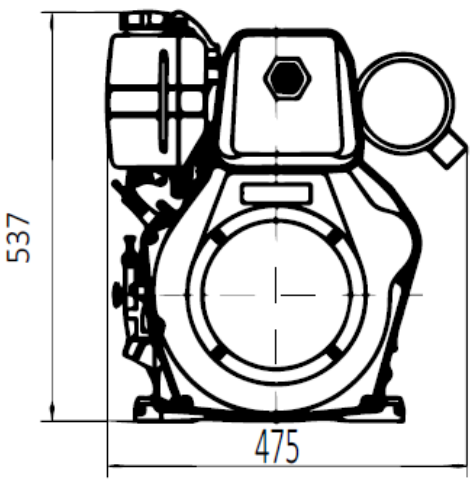

SHAFT AND FLANGE TYPE

NK1100FE - NK1105FE

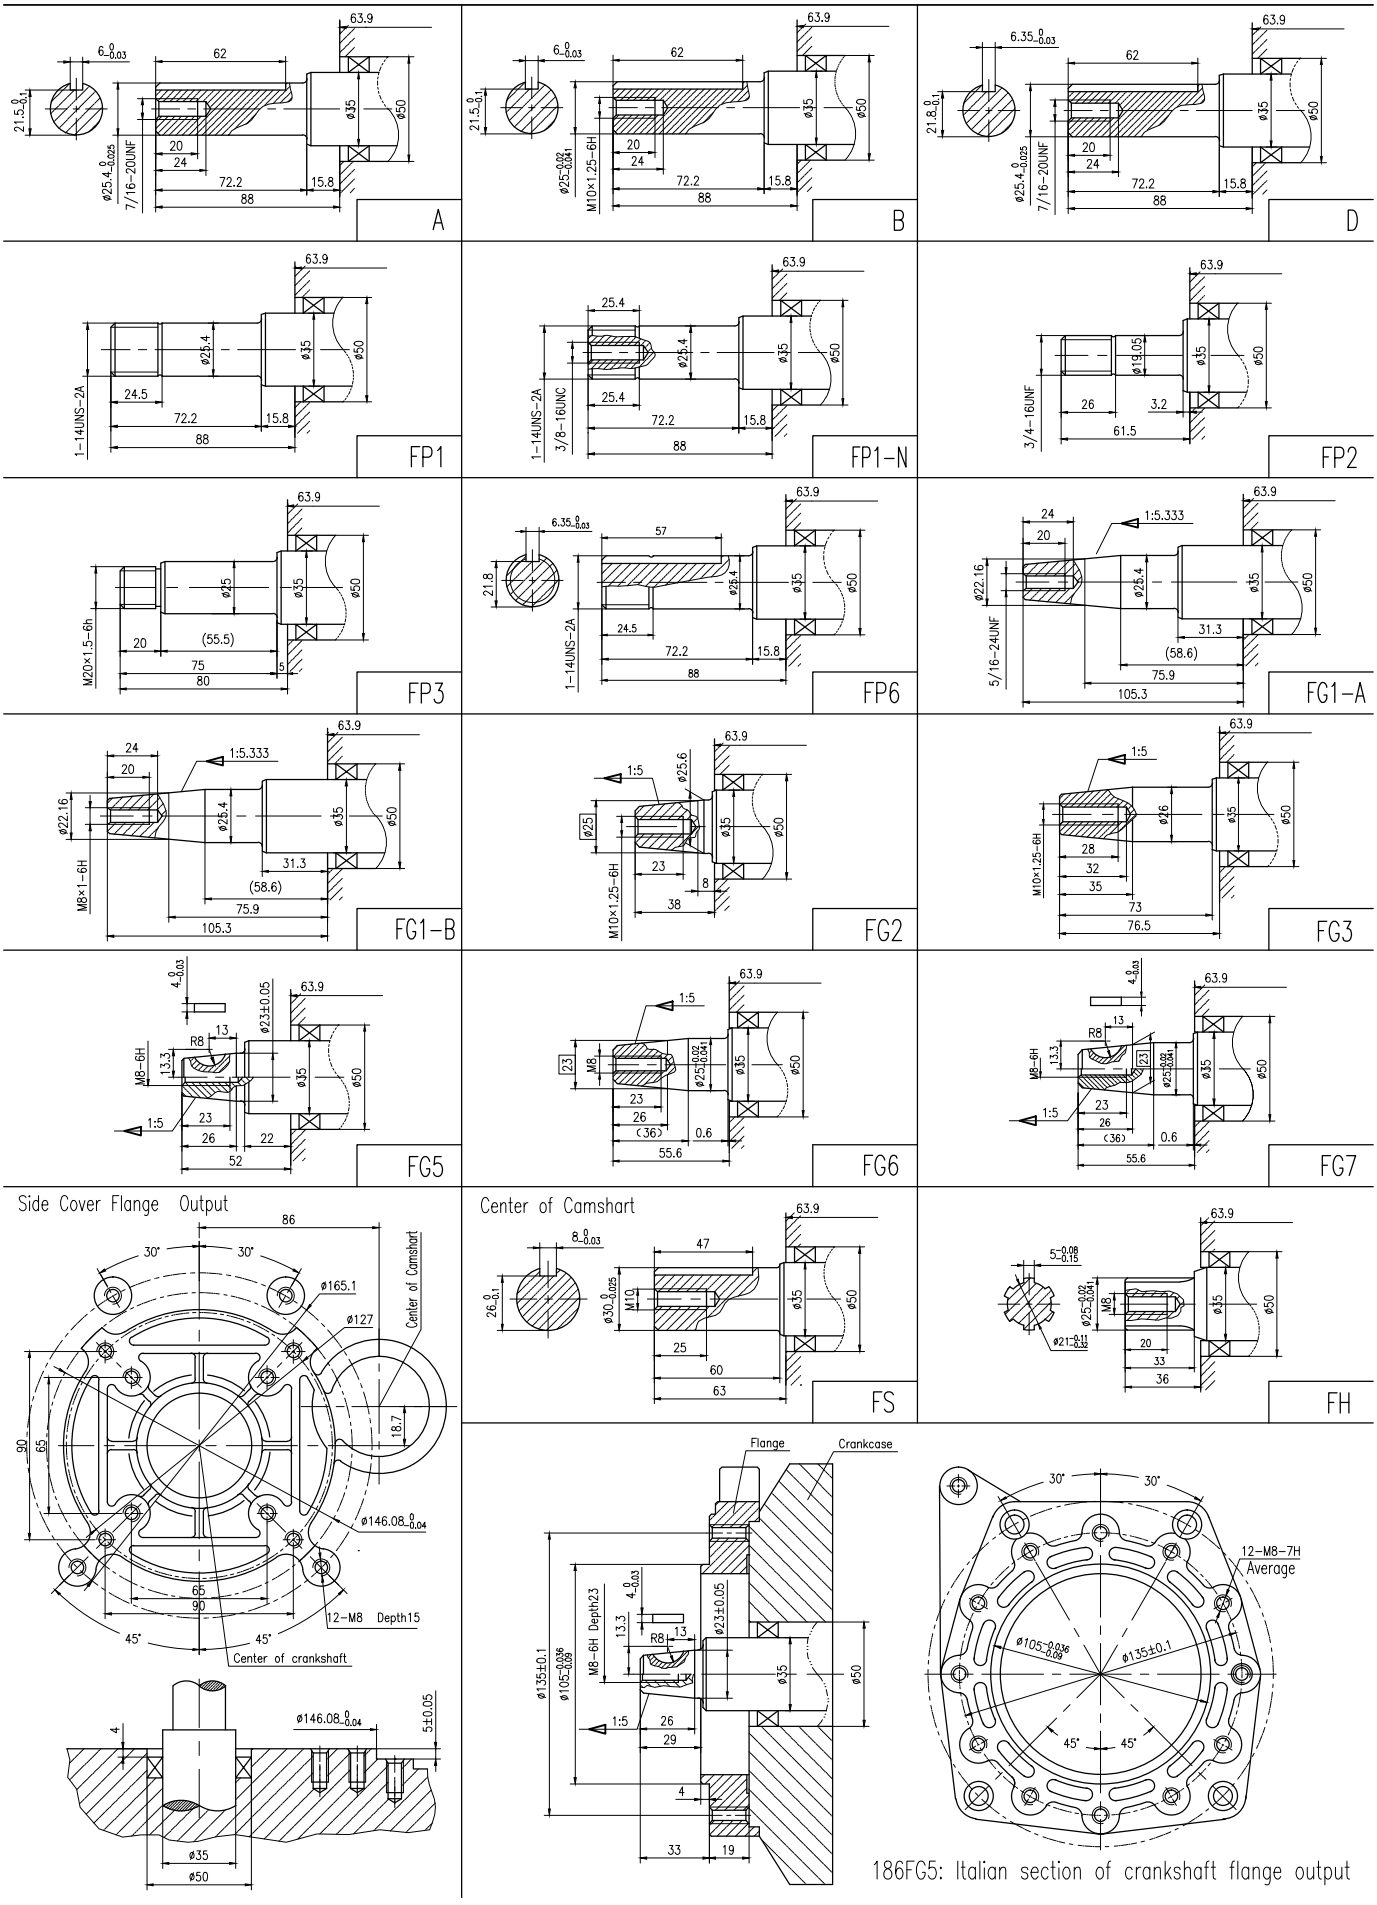

186FG5: Italian section of crankshaft flange output