AIR COOLED DIESEL ENGINE

NK170F
NK178FA





Application:

AGRICULTURE MACHINERY · GENERATOR · FIRE FIGHTING · WATER PUMP


Certification:

CE · EURO STAGE 5


MODEL		NK170F	NK178FA
ENGINE TYPE		single cylinder, vertical, 4 stroke direct injection	single cylinder, vertical, 4 stroke direct injection
BORE * STROKE	mm	70*55	78*64
DISPLACEMENT	cc	211	306
ROTATION SPEED	rpm	3600	3600
MAX. OUTPUT POWER	HP	5	8
FUEL TANK CAPACITY	Lt	2.5	3.5
OIL CAPACITY	ml	750	1100
FUEL CONSUMPTION	gr/Kw*h	<295	<280
STARTING SYSTEM		Recoil or Electric	Recoil or Electric
COMPRESSION RATIO		20 : 1	20 : 1
PACKAGE DIMENSIONS	mm	420 x 380 x 470	480 x 460 x 520
WEIGHT NET / GROSS	Kg	27/29	34/36
LOADING 20GP/40GP/40HQ	pcs	390 / 840 / 922	240 / 480 / 600
MOQ	pcs	10	10

PERFORMANCE CURVES

NK170F

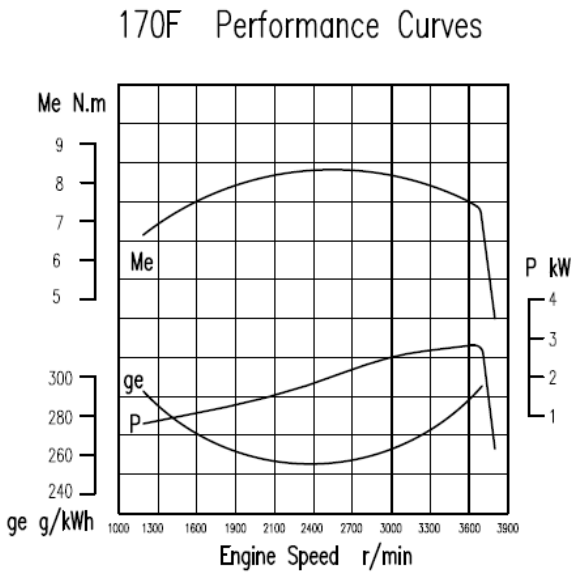



NK178FA

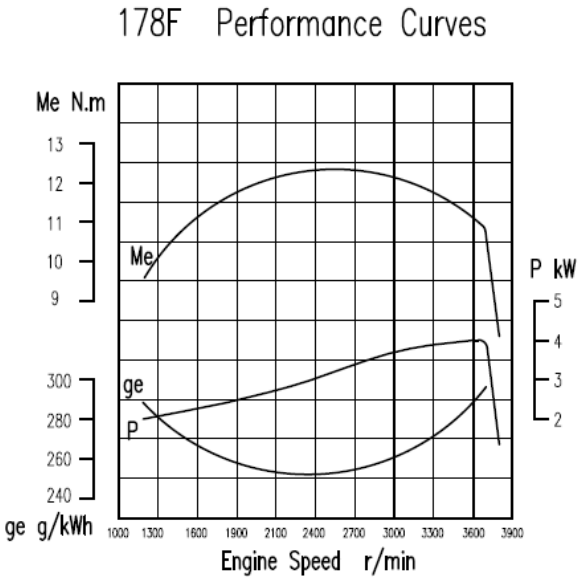


ENGINES DIMENSIONS


NK170F

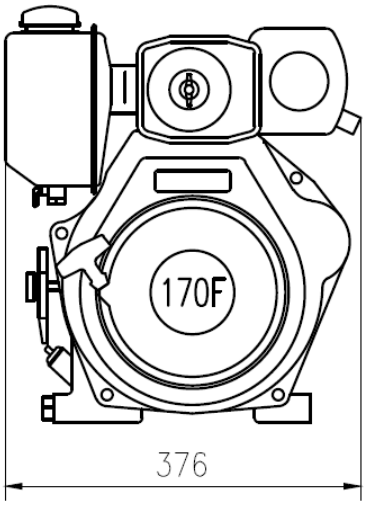

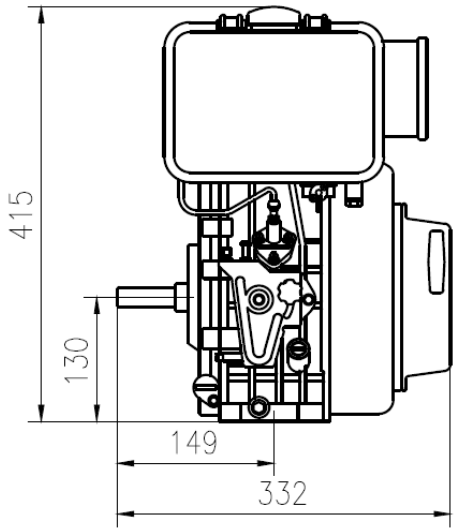


NK178FA

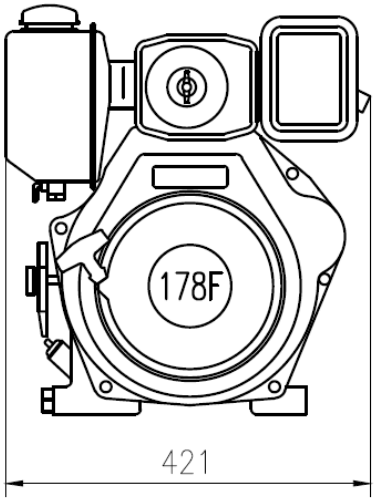

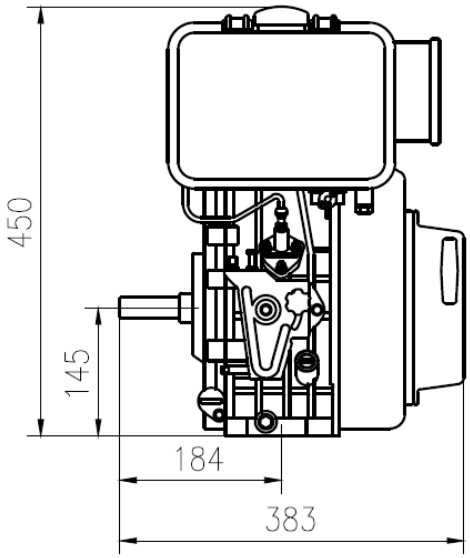


SHAFT AND FLANGE TYPE


NK170F

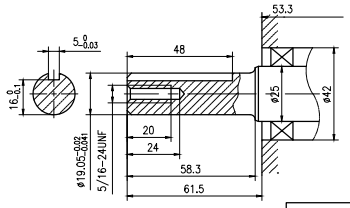


170F-A

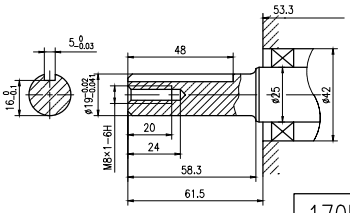


170F-B

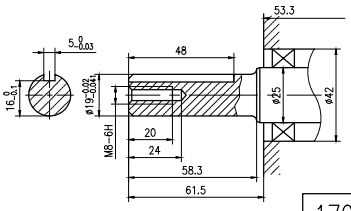


170F-C

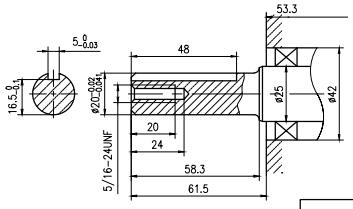


170F-K




170FP1




170FP1-N




170FP2




170FG1




170FG2




170FG3





170FG5




170FG7

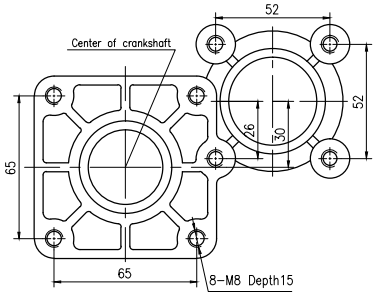



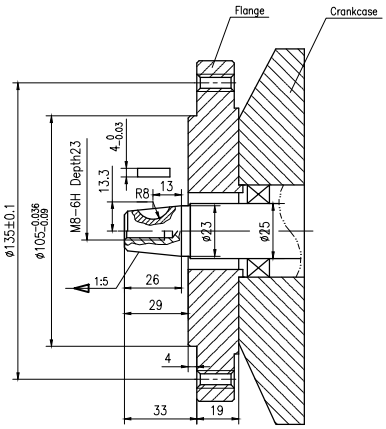


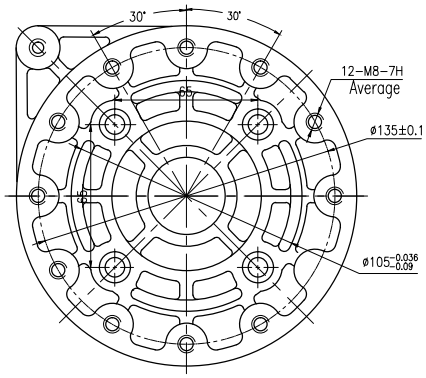



170FG5: Italian section of crankshaft flange output


SHAFT AND FLANGE TYPE


NK178FA

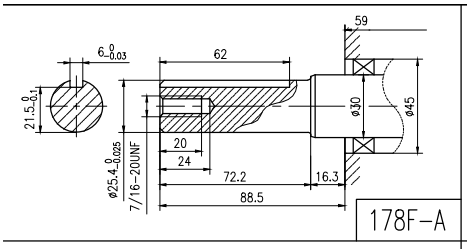


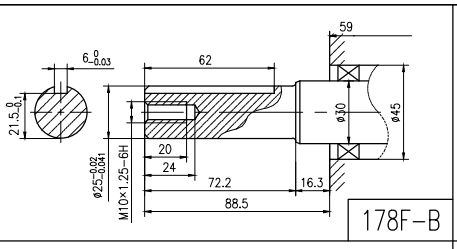


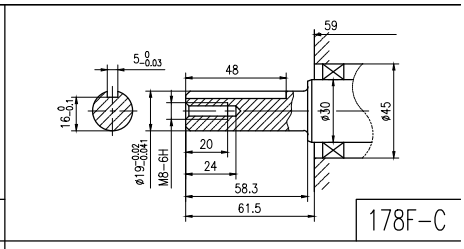


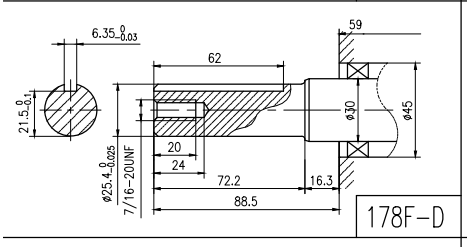


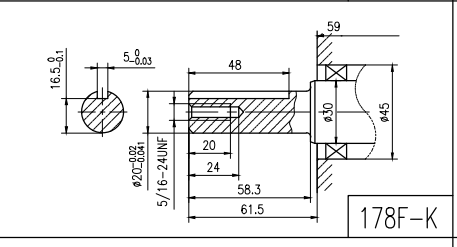


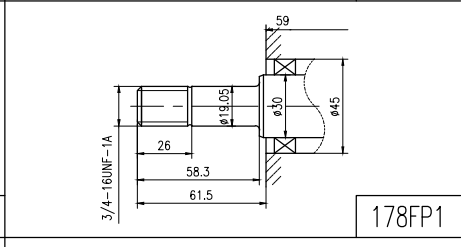


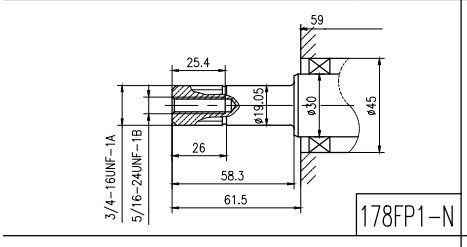


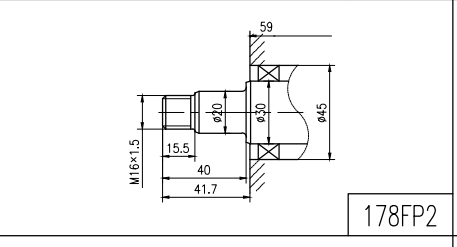


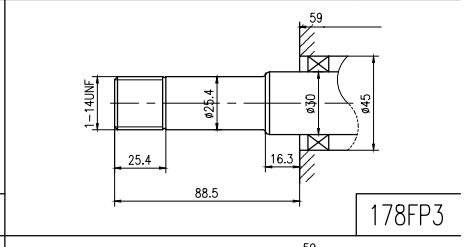


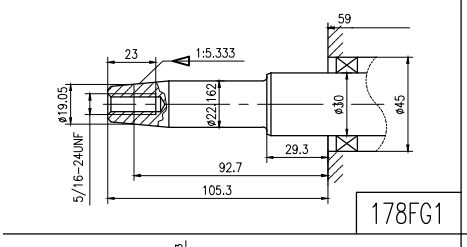


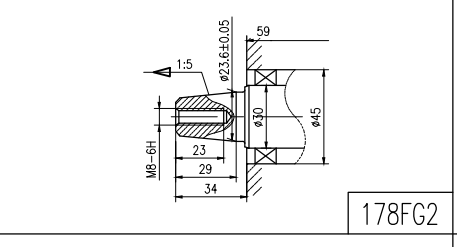

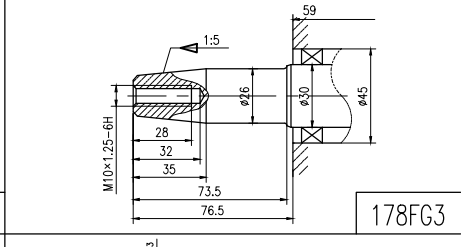


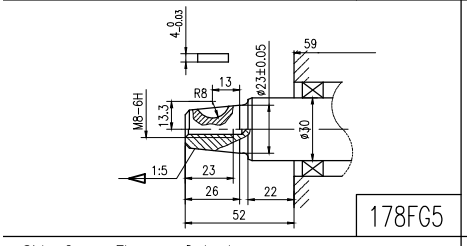

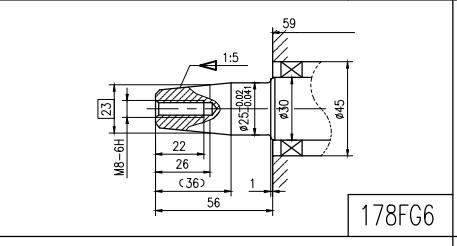


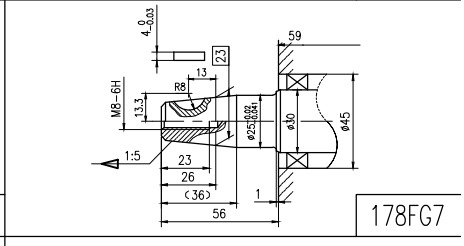



Side Cover Flange Output

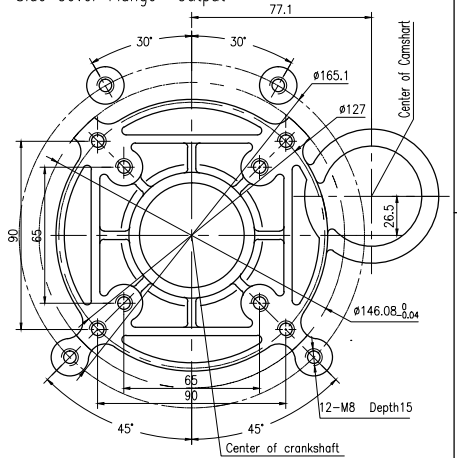


Center of Camshart

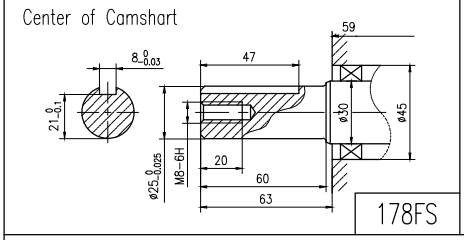

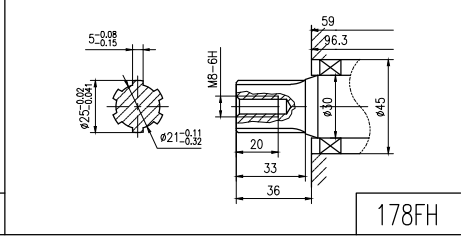

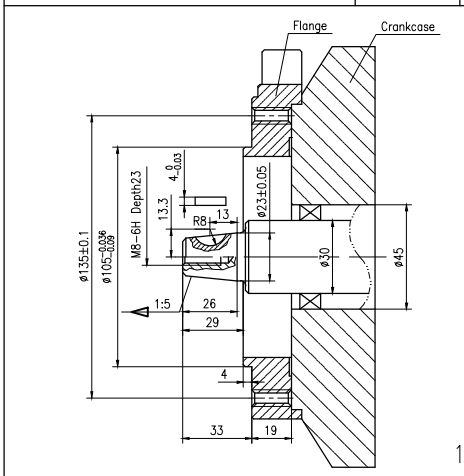

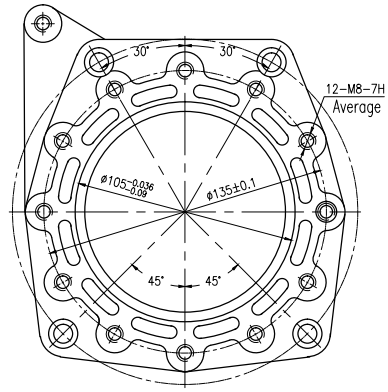

178FG5: Italian section of crankshaft flange outp