
AIR COOLED DIESEL ENGINE

NK292FE
NK2V95FE



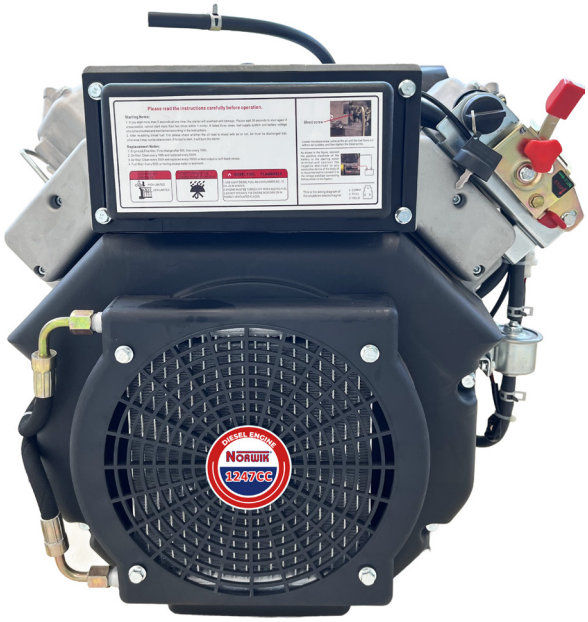

Application:

AGRICULTURE MACHINERY | GENERATOR | FIRE FIGHTING | WATER PUMP


Certification:

CE EURO STAGE 5


MODEL		NK292FE	NK2V95FE
ENGINE TYPE		two cylinder, vertical, 4 stroke air cooled	v-twin cylinder, 4 stroke air cooled
BORE * STROKE	mm	92*75	95*88
DISPLACEMENT	cc	997	1247
ROTATION SPEED	rpm	3600	3600
MAX. OUTPUT POWER	HP	23	27
FUEL TANK CAPACITY	Lt	7	/
OIL CAPACITY	ml	1800 - 2800	1700 - 3800
FUEL CONSUMPTION	gr/Kw*h	265	265
STARTING SYSTEM		Electric	Electric
COMPRESSION RATIO		19.5 :1	20 :1
PACKAGE DIMENSIONS	mm	635 x 545 x 695	630 x 550 x 730
WEIGHT NET / GROSS	Kg	78/85	86/96
LOADING 20GP/40GP/40HQ	pcs	192 / 384 / 384	108 / 216 / 216
MOQ	pcs	5	5

PERFORMANCE CURVES

NK292FE

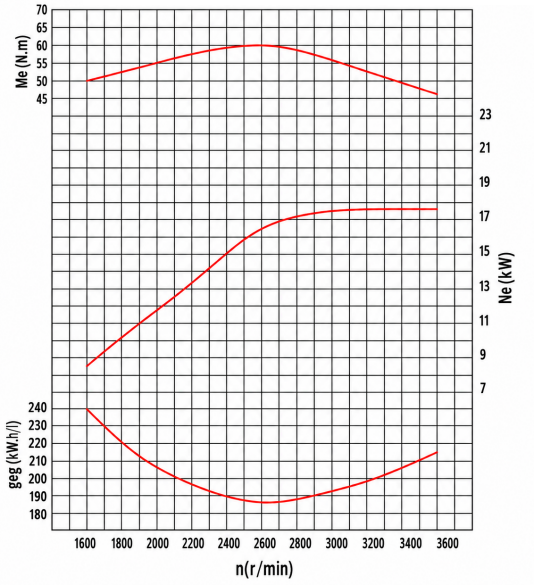



NK2V95FE

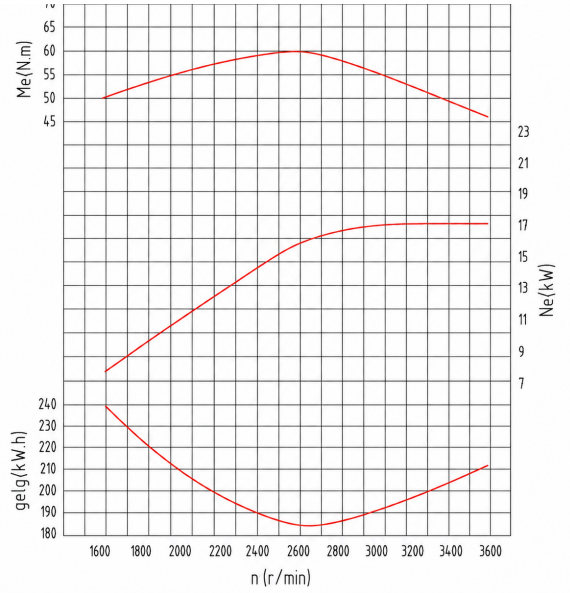


ENGINES DIMENSIONS


NK292FE

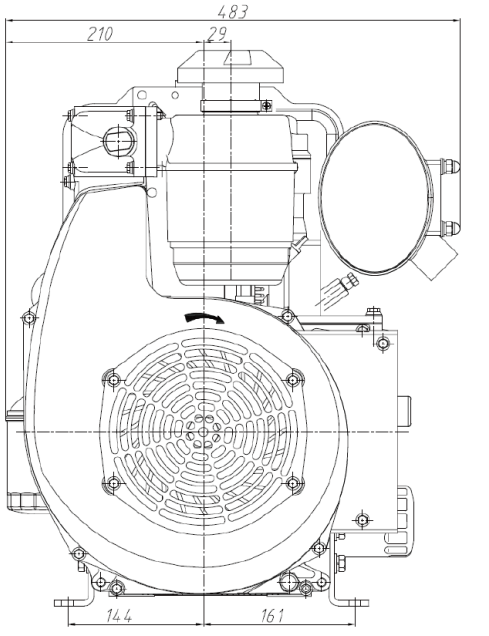

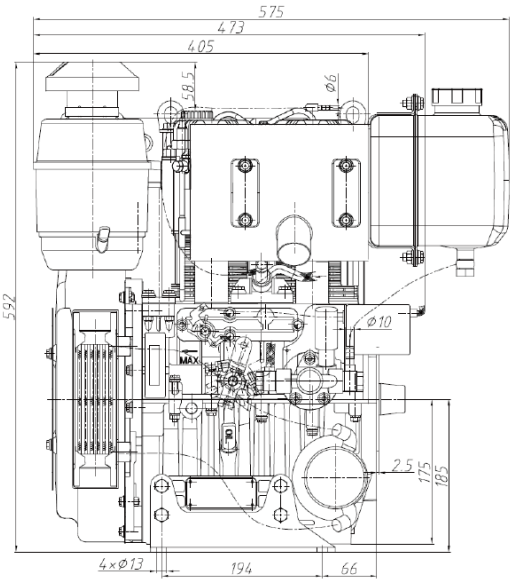

NK2V95FE

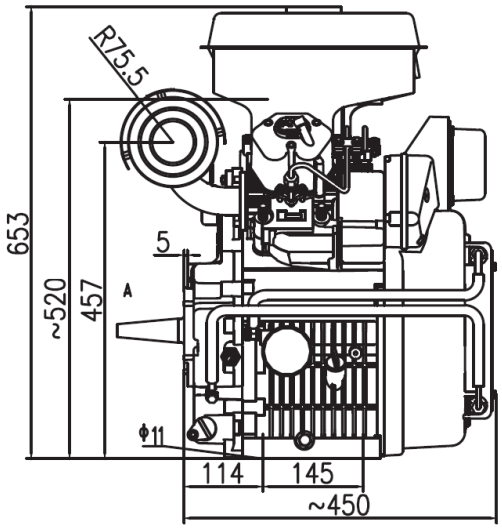


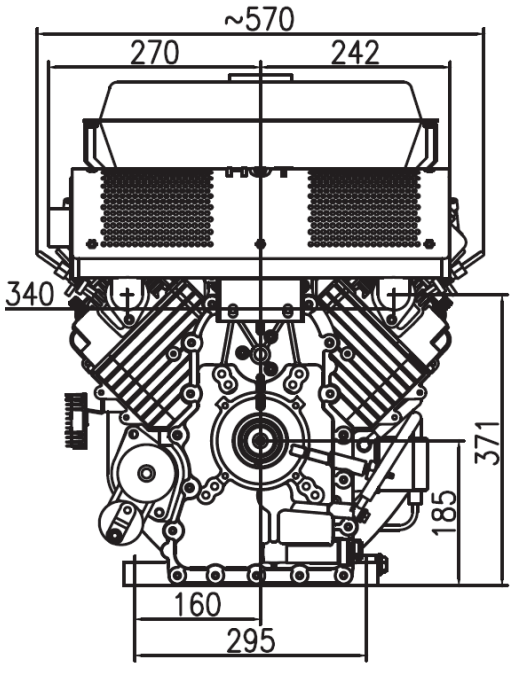


SHAFT AND FLANGE TYPE

NK2V95FE


35

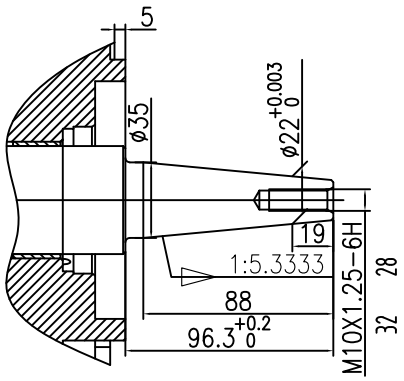


32

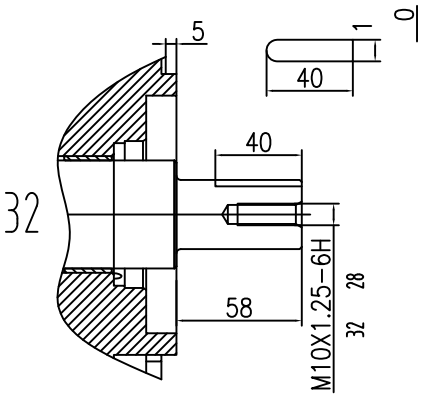


25.4

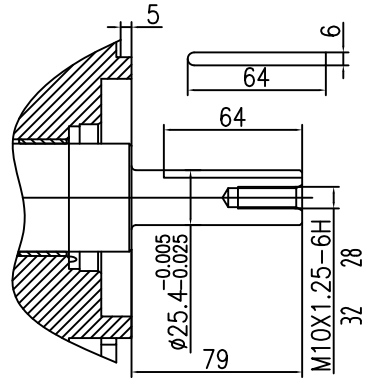


28.575

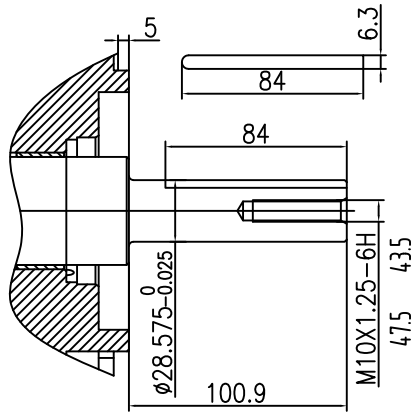


25.4

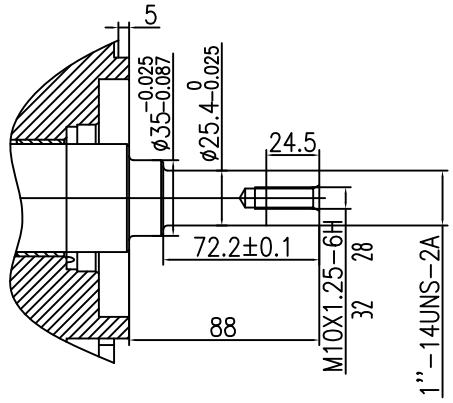

38

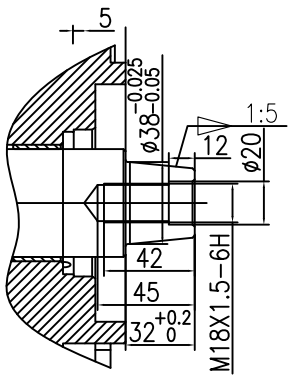



25

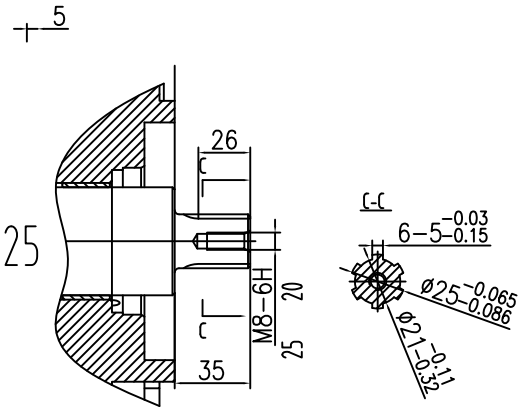

HD2V95F


35

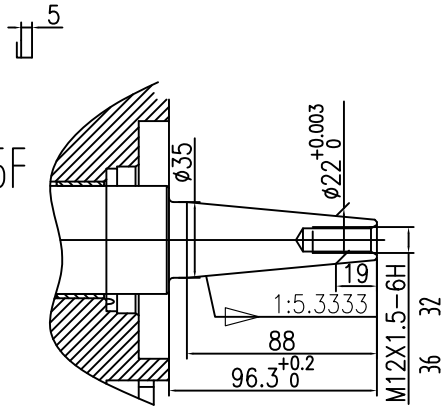

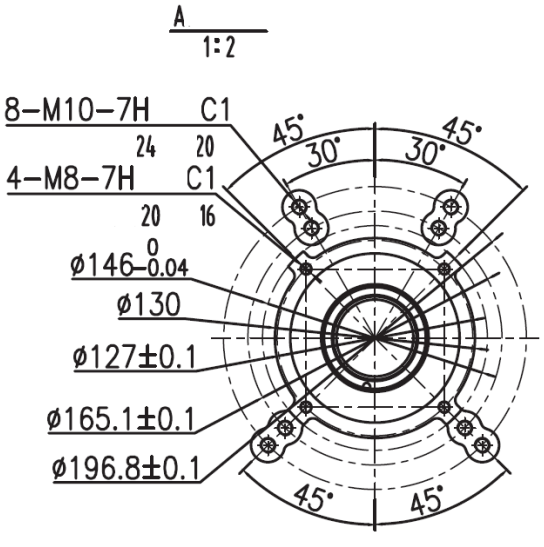


SHAFT AND FLANGE TYPE


NK292FE

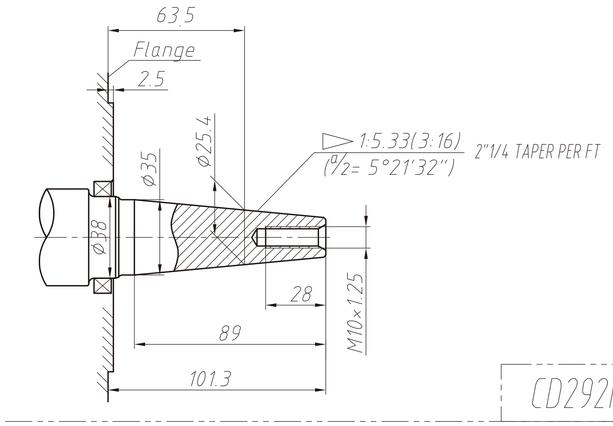


CD292F-G1

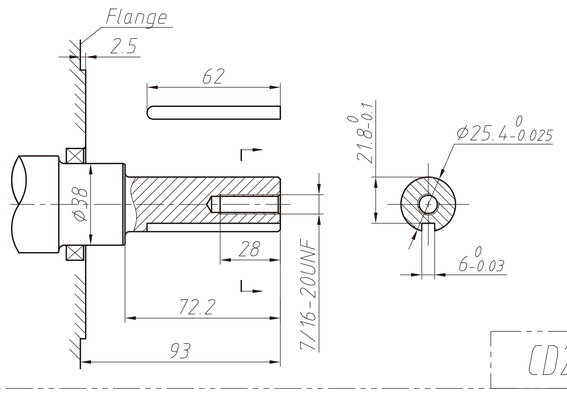


CD292F-A

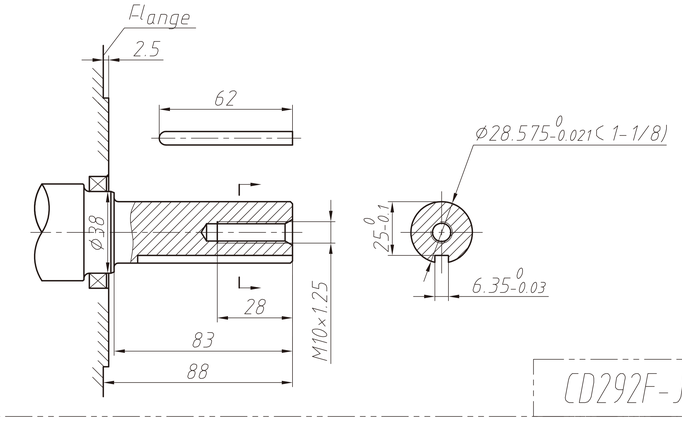


CD292F-J2

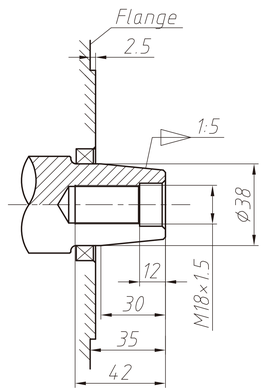


CD292F-G2

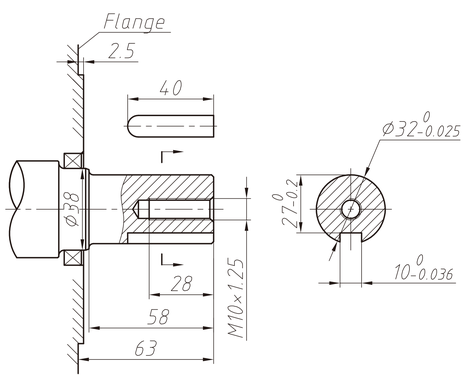


CD292F-J1

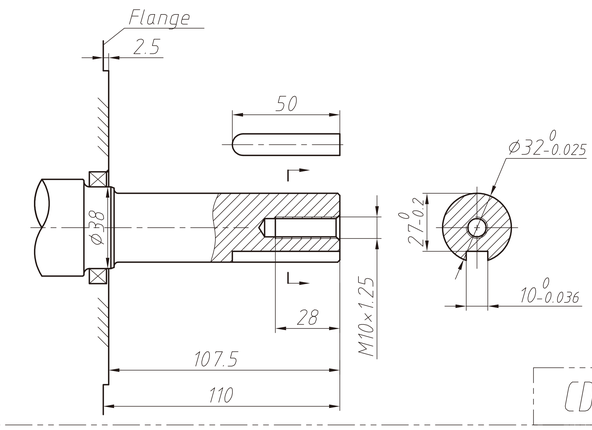

CD292F-J3

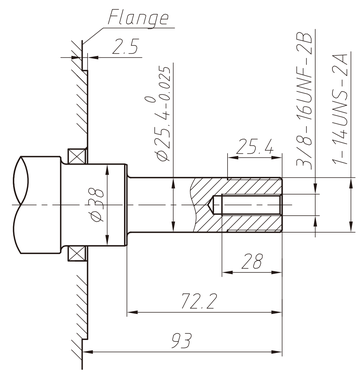


CD292F-P1

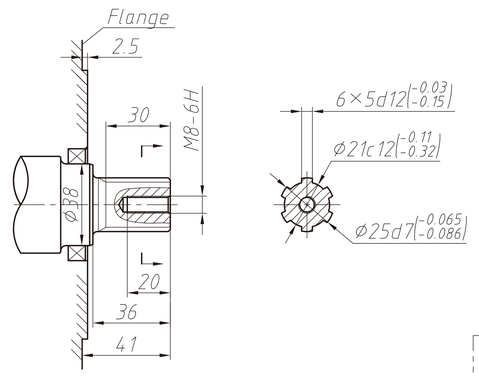

CD292F-H1

Basic Type-ϕ125

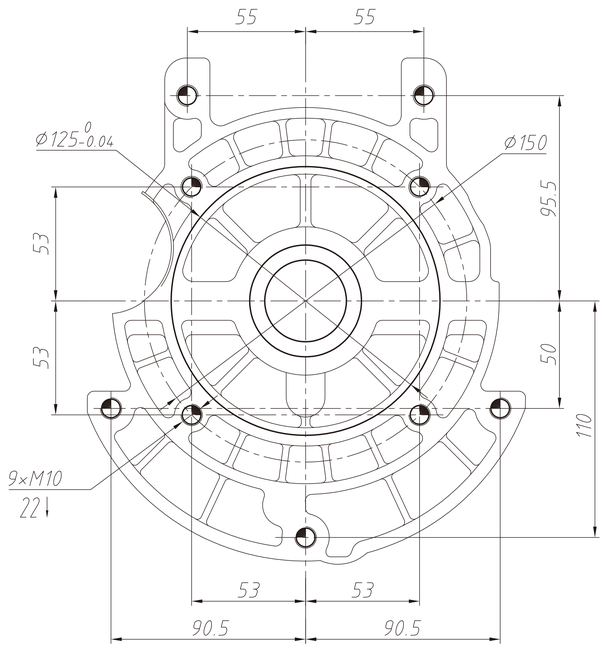

A Type-J609B_ ϕ146

