GASOLINE ENGINES - HORIZONTAL SHAFT

NK680E
NK750BE
NK1000E





Application:

AGRICULTURE MACHINERY | GENERATOR | FIRE FIGHTING | WATER PUMP


Certification:


CE EURO STAGE 5

MODEL		NK680E	NK750BE	NK1000E
ENGINE TYPE		V twin horizontal , 4 stroke air cooled	V twin horizontal , 4 stroke air cooled	V twin horizontal , 4 stroke air cooled
BORE * STROKE	mm	78*71	82*71	90*78.5
DISPLACEMENT	cc	679	750	999
ROTATION SPEED	rpm	3900	3900	/
MAX. OUTPUT POWER	HP	20	24.5	33
OIL CAPACITY	ml	1500	1500	2500
FUEL CONSUMPTION	gr/Kw*h	≤370	≤370	≤370
STARTIG SYSTEM		Recoil or Electric	Recoil or Electric	Electric
PACKAGE DIMENSIONS	mm	550 x 550 x 530	550 x 550 x 530	605 x 585 x 560
WEIGHT NET / GROSS	Kg	43.5/46	43.5/46	54/57
LOADING 20GP/40GP/40HQ	pcs	160 / 336 / 416	160 / 336 / 416	108 / 240 / 240
MOQ	pcs	160	160	108


ENGINE DIMENSIONS


NK680E NK750BE

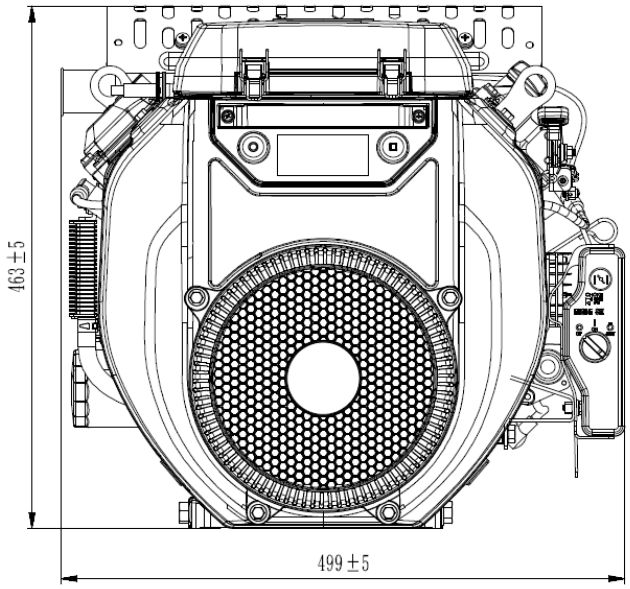

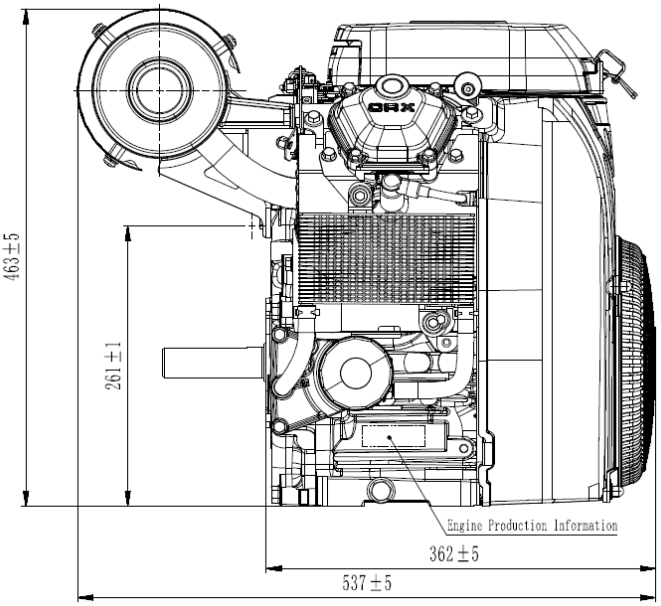


NK1000E

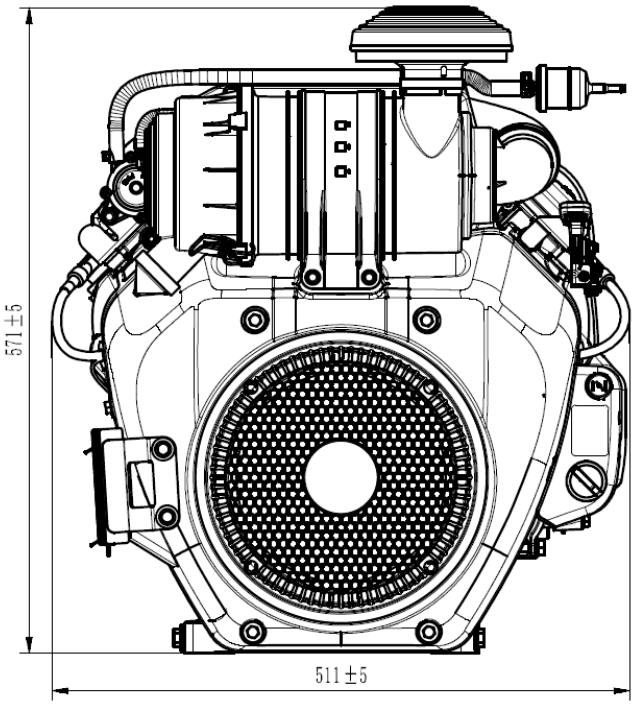

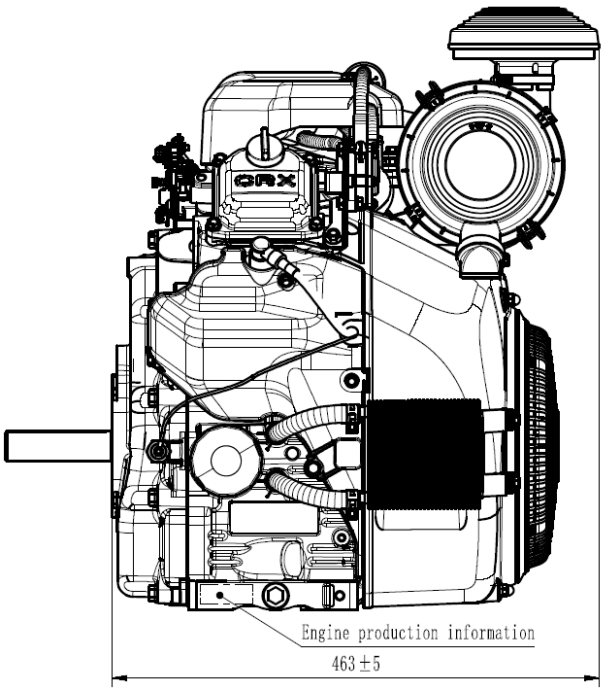


CURVE


NK680E

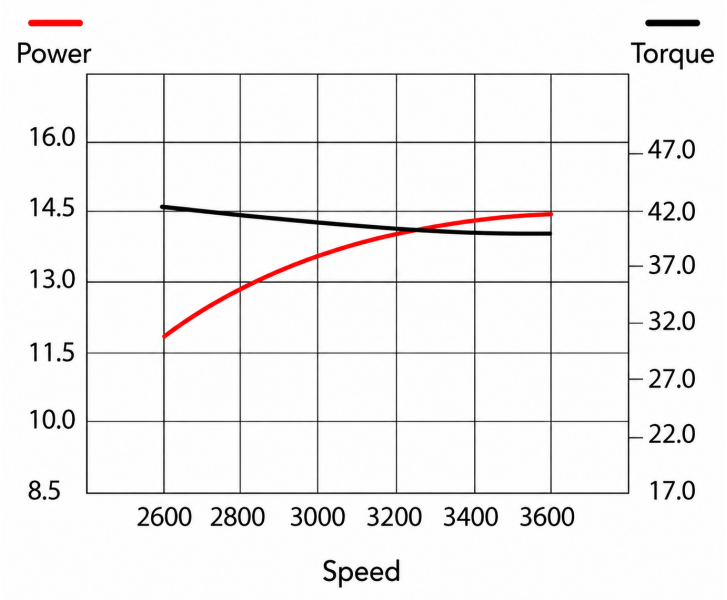

NK750BE

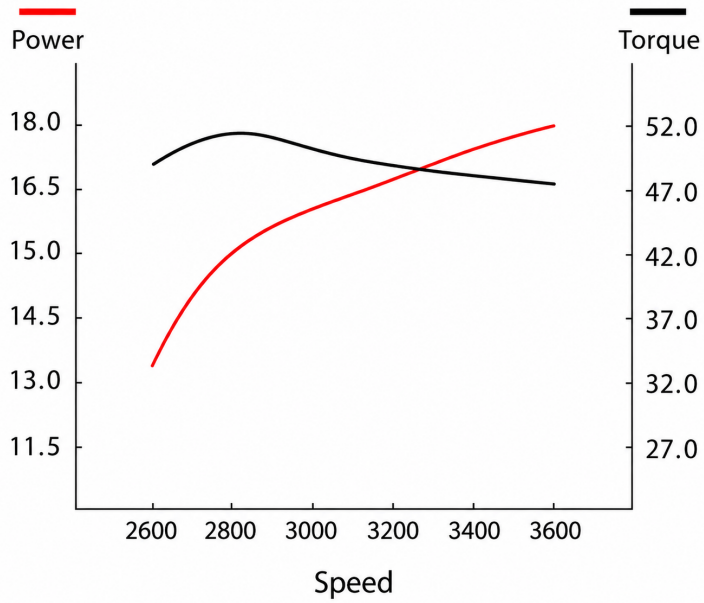



NK1000E

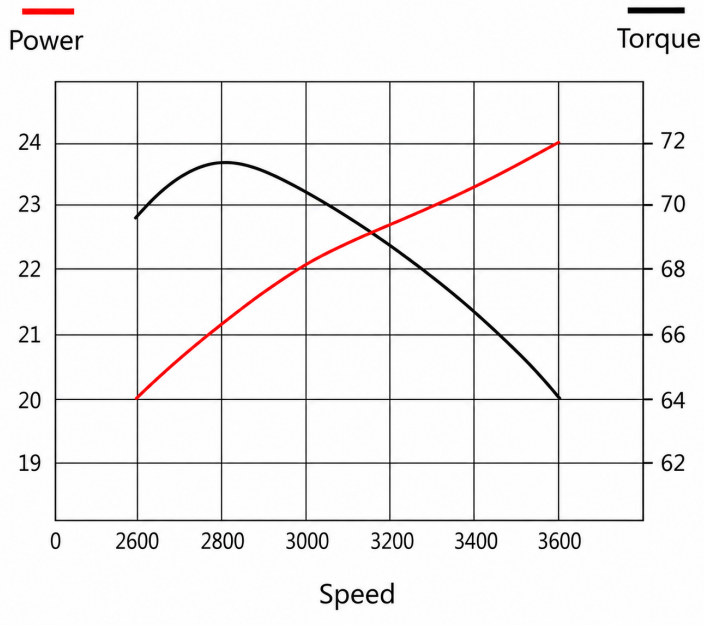

SHAFT AND FLANGE TYPE

NK680E NK750BE

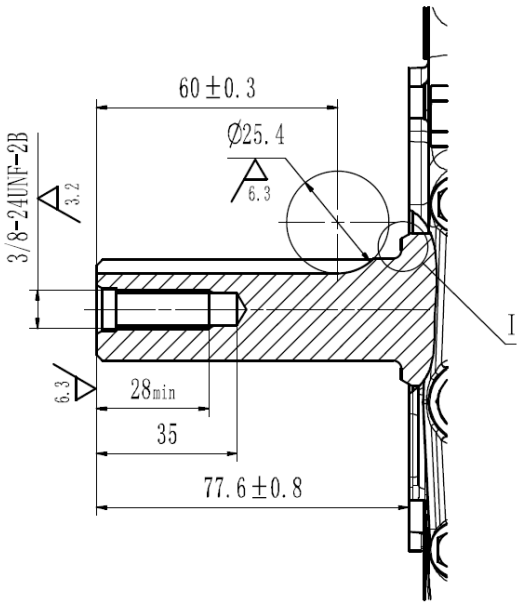

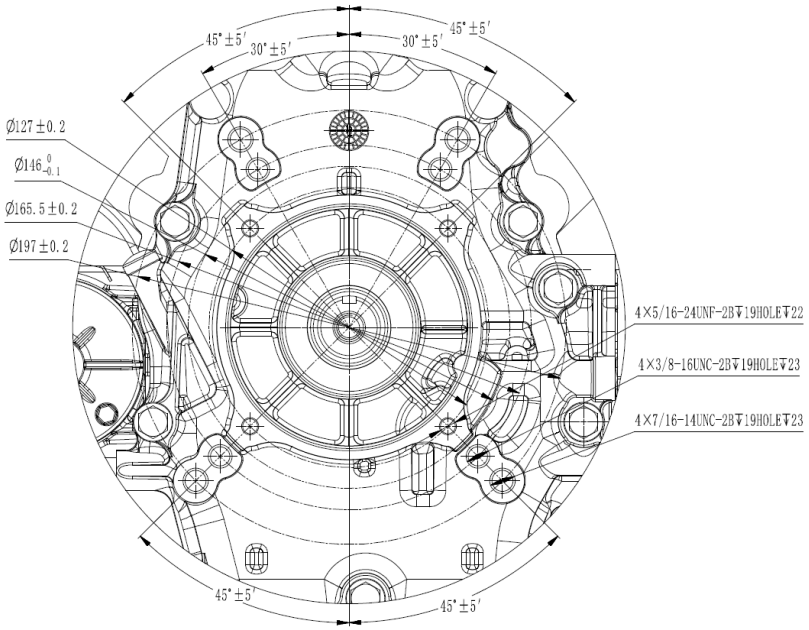

NK1000E

