AIR COOLED DIESEL ENGINE

NK192FB
NK195F





Application:

AGRICULTURE MACHINERY · GENERATOR · FIRE FIGHTING · WATER PUMP


Certification:

CE · EURO STAGE 5


MODEL		NK192FB	NK195F
ENGINE TYPE		single cylinder, vertical, 4 stroke direct injection	single cylinder, vertical, 4 stroke direct injection
BORE * STROKE	mm	92*75	95*75
DISPLACEMENT	cc	498	531
ROTATION SPEED	rpm	3600	3600
MAX. OUTPUT POWER	HP	13	13.5
FUEL TANK CAPACITY	Lt	5.5	5.5
OIL CAPACITY	ml	1650	1650
FUEL CONSUMPTION	gr/Kw*h	<286	<286
STARTING SYSTEM		Recoil or Electric	Recoil or Electric
COMPRESSION RATIO		19 :1	19 :1
PACKAGE DIMENSIONS	mm	500 x 460 x 555	500 x 460 x 555
WEIGHT NET / GROSS	Kg	49/51	50/52
LOADING 20GP/40GP/40HQ	pcs	220 / 460 / 529	220 / 460 / 529
MOQ	pcs	10	10

PERFORMANCE CURVES

NK192FB

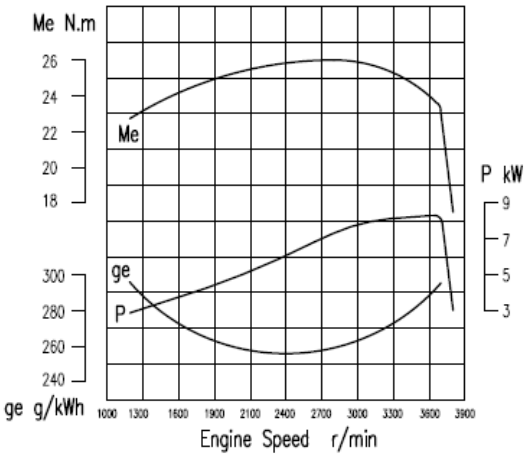



NK195F

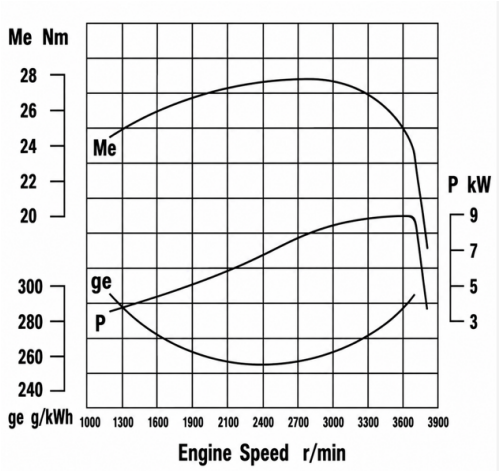


ENGINES DIMENSIONS


NK192FB

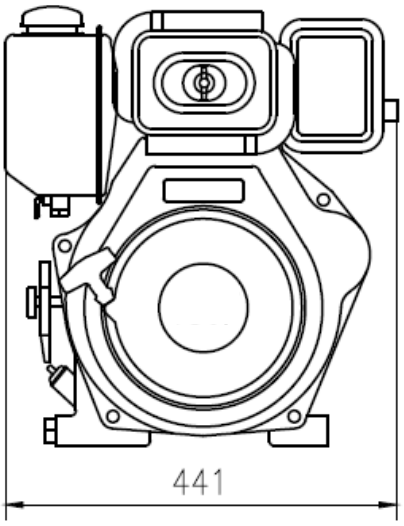

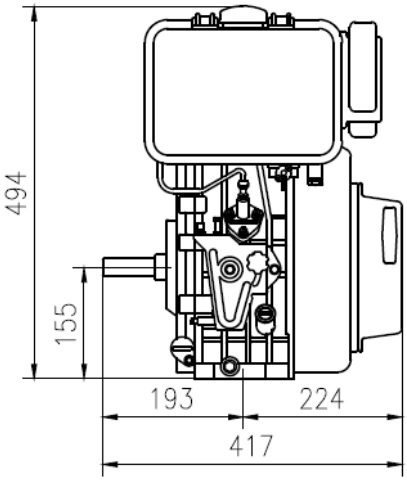

NK195F

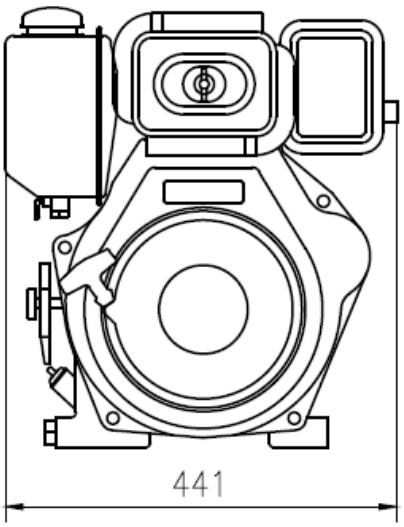

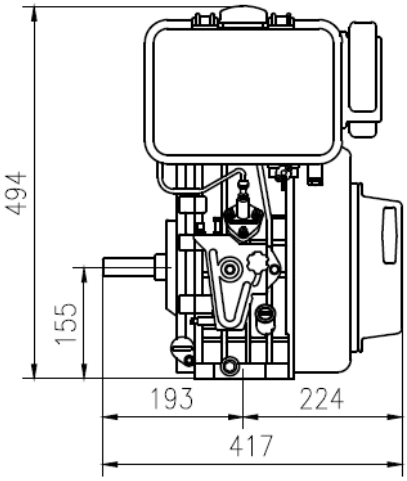

SHAFT AND FLANGE TYPE

NK192FB - NK195F

