
GASOLINE ENGINES - HORIZONTAL SHAFT

NK168FB
NK170F-1



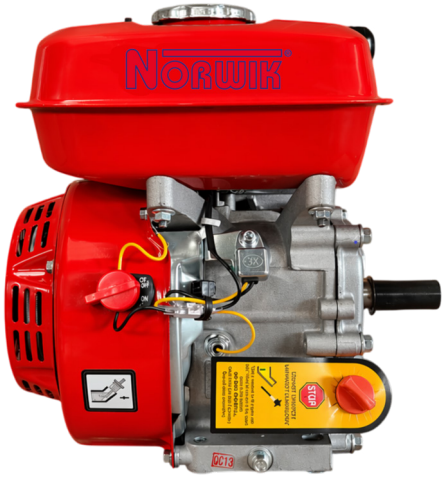

Application:

AGRICULTURE MACHINERY | GENERATOR | FIRE FIGHTING | WATER PUMP


Certification:


CE EURO STAGE 5

MODEL		NK168FB	NK170F-1
ENGINE TYPE		single cylinder, vertical, 4 stroke air cooled	single cylinder, vertical, 4 stroke air cooled
BORE * STROKE	mm	68*54	70*55
DISPLACEMENT	cc	196	212
ROTATION SPEED	rpm	3600	3600
MAX. OUTPUT POWER	HP	6.5	7
FUEL TANK CAPACITY	Lt	3,6	3,6
OIL CAPACITY	ml	600	600
FUEL CONSUMPTION	gr/Kw*h	<395	<395
STARTIG SYSTEM		Recoil or Electric	Recoil or Electric
COMPRESSION RATIO		8.5 : 1	8.5 : 1
PACKAGE DIMENSIONS	mm	400 x 345 x 380	400 x 345 x 380
WEIGHT NET / GROSS	Kg	15/16	15/16
LOADING 20GP/40HQ	pcs	576 / 1358	576 / 1358
MOQ	pcs	20	20

ENGINE DIMENSIONS


NK168FB - NK170F-1

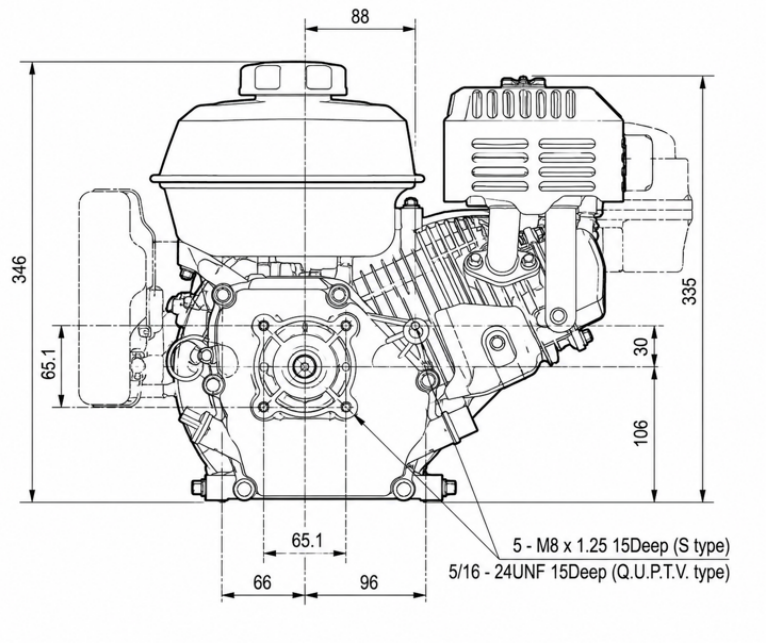

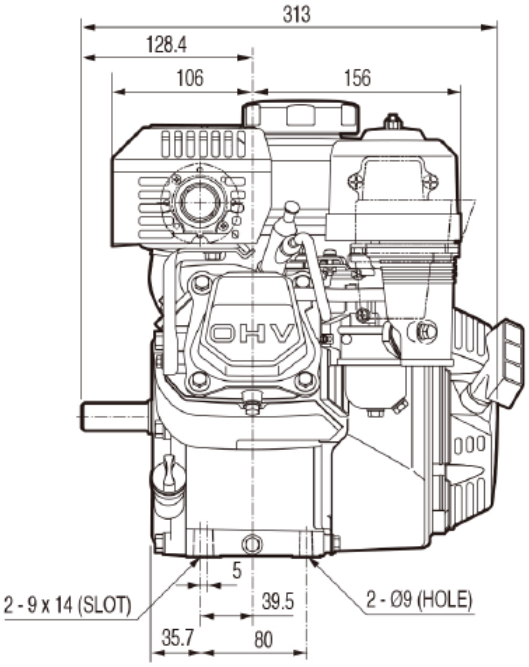


CURVE

NK168FB

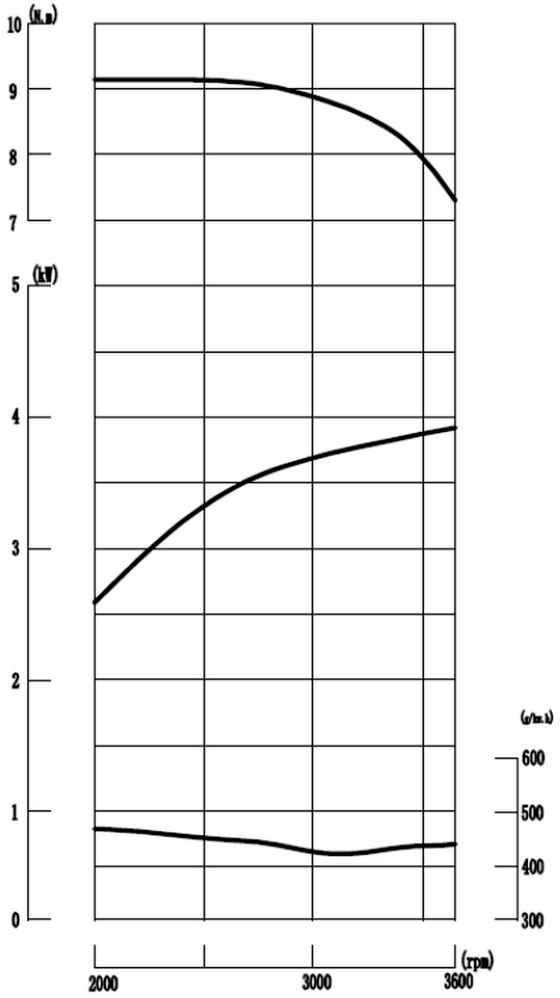


NK170F-1

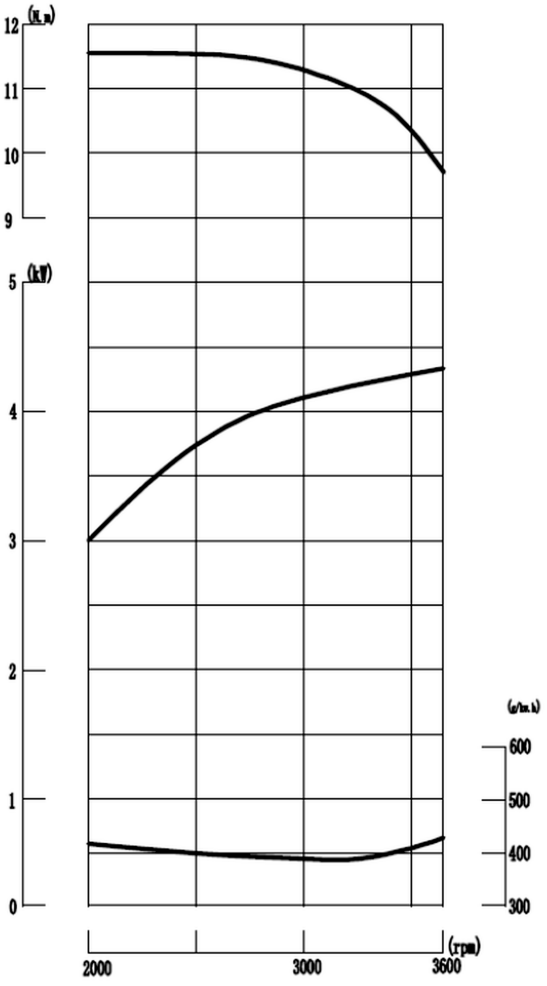


SHAFT AND FLANGE TYPE


NK168FB | **NK170F-1**

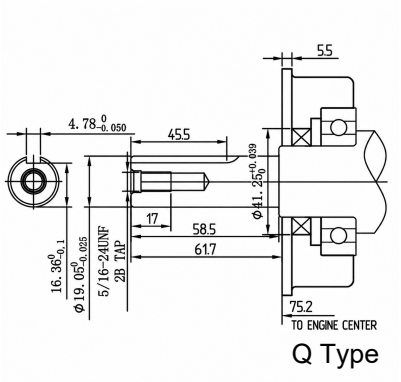


Q Type

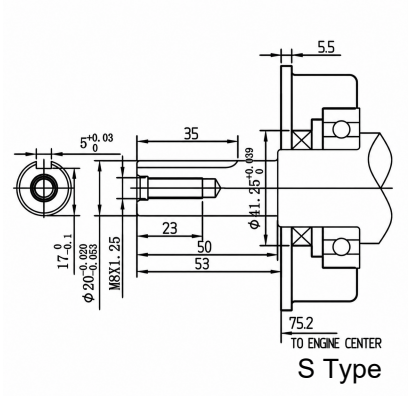


S Type

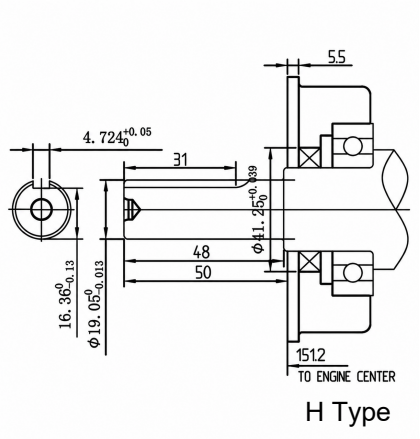


H Type

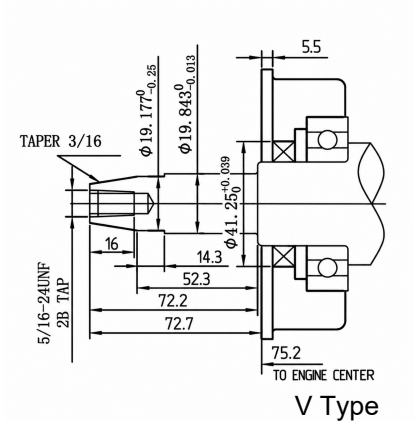


V Type

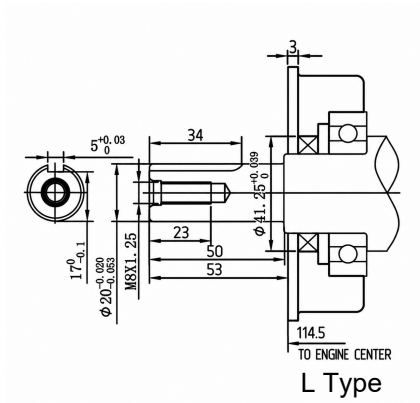


L Type

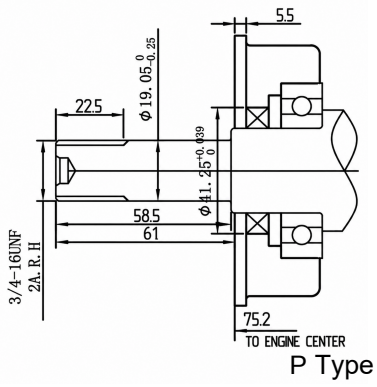


P Type

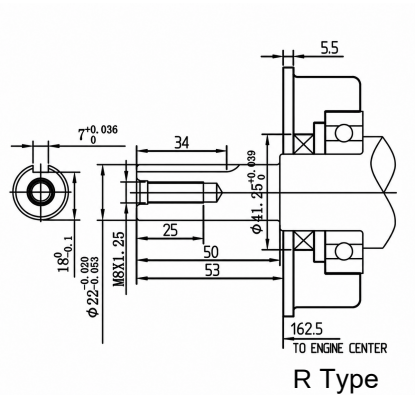


R Type

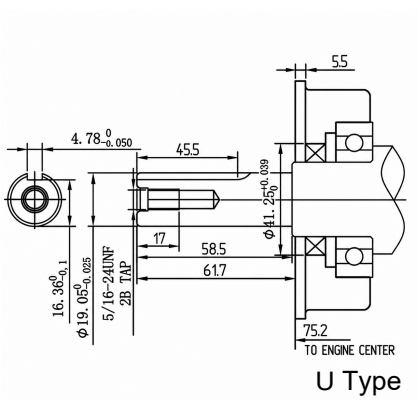

U Type

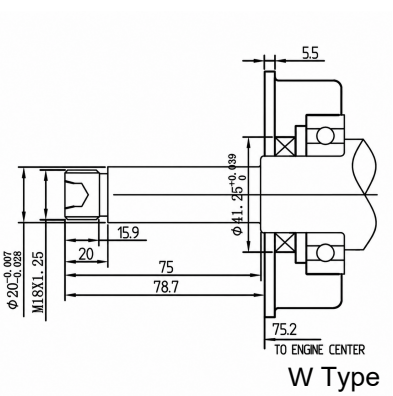

W Type

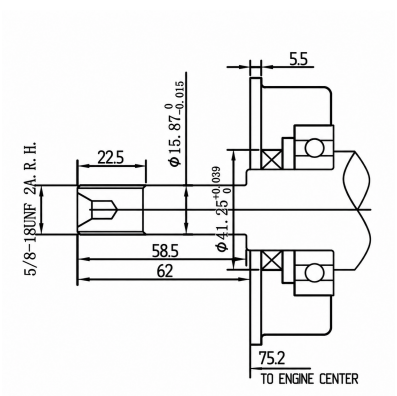

T Type

